



LED lighting system for installation inside industrial machines.  
 Exceptionally powerful luminous flux. Light color 6500K.  
 Up to 50% energy saving compared with traditional lighting.  
 No maintenance required throughout entire life cycle.  
 Integrated driver system. 24VDC power supply.  
 Available in 4 versions (built-in/external).

**TECNICAL FEATURES**

Model	Power supply	Power Watt	Current	Light color	Lumen LED	Weight
ANTARIO 27.x	24Vdc	27 W	1,2 A	6500K CRI80	2800	1,40 Kg ~
ANTARIO 42.x	24Vdc	42 W	1,8 A	6500K CRI80	4200	2,70 Kg ~
ANTARIO 68.x	24Vdc	68 W	2,9 A	6500K CRI80	7000	3,00 Kg ~
ANTARIO 96.x	24Vdc	96 W	4,0 A	6500K CRI80	9800	4,50 Kg ~

X: I built-in – E external

Index of protection  
 IEC class  
 Driver led  
 Electrical connection


IP67  
 III  
 Integrated Driver System  
 cable 3x0,75mmq PUR

**Mechanical features**

Structure  
 Protective glass  
 De-glaring diffuser  
 Fastening  
 Output cable  
 Operating temperature

Painted aluminum grey RAL 9006 – white RAL9010  
 4mm – tempered transparent glass  
 in PMMA  
 M5 screws  
 on the bottom  
 min -20° C - max +55° C

**DIMENSIONS (all values in mm)**

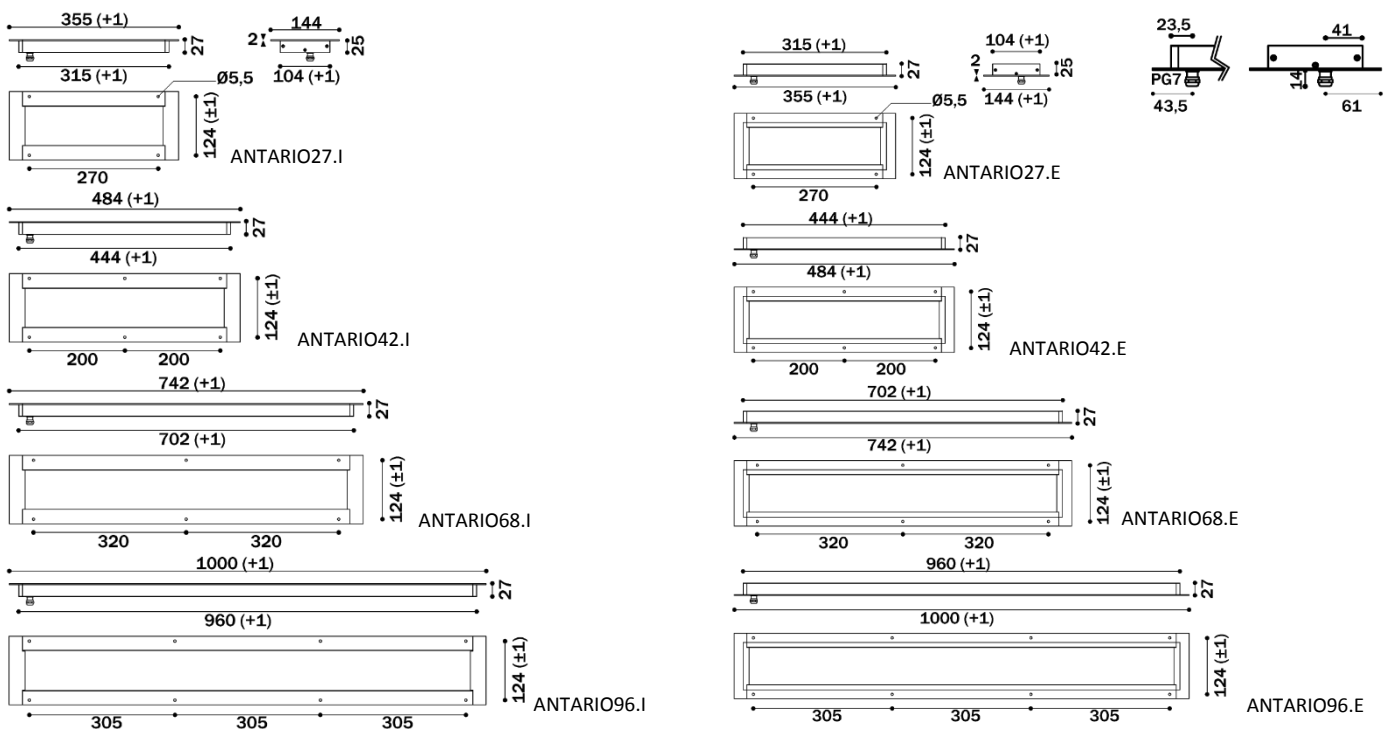

The tolerances depend on the working procedure of the raw materials. We recommend the installation of the lamp with passing screws.